

GENERAL PURPOSE APPLICATION.  
SWITCHING APPLICATION.


### FEATURES

- Excellent  $h_{FE}$  Linearity  
:  $h_{FE}(I_C=0.1mA)/h_{FE}(I_C=2mA)=0.95(Typ.)$ .
- Low Noise :NF=1dB(Typ.) at f=1kHz.
- Complementary to KTC9015S.
- Suffix U : Qualified to AEC-Q101.  
ex) KTC9014S-D-RTK/PU


### MAXIMUM RATING (Ta=25 )

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	$V_{CBO}$	60	V
Collector-Emitter Voltage	$V_{CEO}$	50	V
Emitter-Base Voltage	$V_{EBO}$	5	V
Collector Current	$I_C$	150	mA
Emitter Current	$I_E$	-150	mA
Collector Power Dissipation	$P_C^*$	350	mW
Junction Temperature	$T_j$	150	
Storage Temperature Range	$T_{stg}$	-55 150	

\*  $P_C$  : Package Mounted On 99.5% Alumina (10 × 8 × 0.6mm)

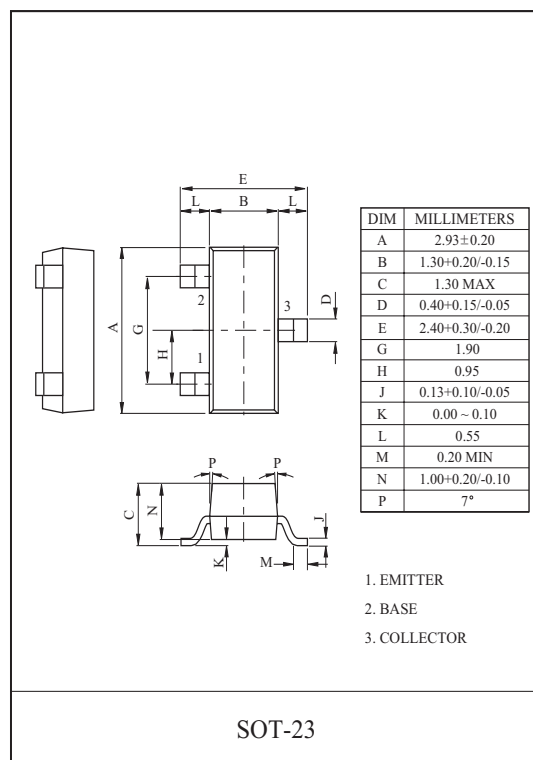

### Marking

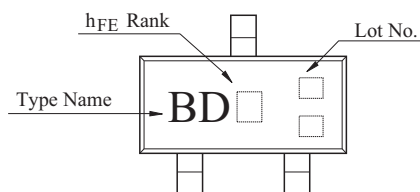


### ELECTRICAL CHARACTERISTICS (Ta=25 )

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	$I_{CBO}$	$V_{CB}=50V, I_E=0$	-	-	50	nA
Emitter Cut-off Current	$I_{EBO}$	$V_{EB}=5V, I_C=0$	-	-	100	nA
DC Current Gain	$h_{FE}$ (Note)	$V_{CE}=5V, I_C=1mA$	100	-	1000	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=100mA, I_B=10mA$	-	0.1	0.25	V
Transition Frequency	$f_T$	$V_{CE}=10V, I_C=1mA, f=100MHz$	60	-	-	MHz
Collector Output Capacitance	$C_{ob}$	$V_{CB}=10V, I_E=0, f=1MHz$	-	2.0	3.5	pF
Noise Figure	NF	$V_{CE}=6V, I_C=0.1mA, R_g=10k, f=1kHz$	-	1.0	10	dB


Note :  $h_{FE}$  Classification B:100 300, C:200 600, D:400 1000

# KTC9014S


$I_C - V_{CE}$   
(LOW VOLTAGE REGION)

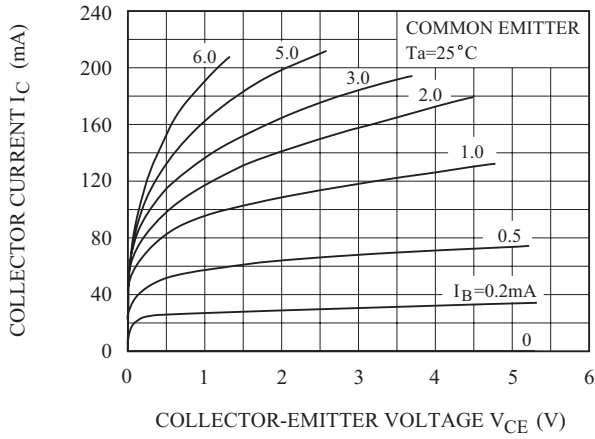


$h_{FE} - I_C$

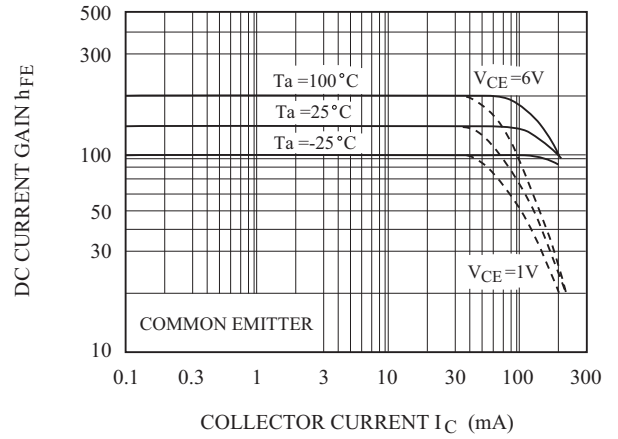


$V_{CE(sat)} - I_C$

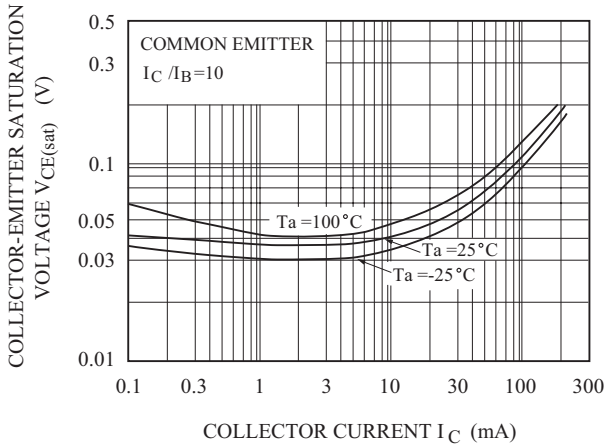

$f_T - I_E$

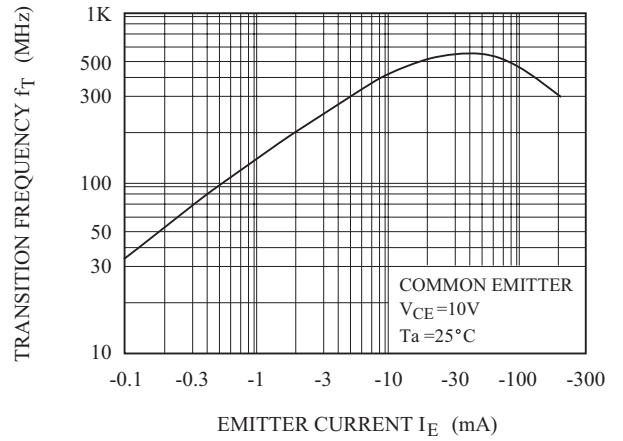

$I_B - V_{BE}$

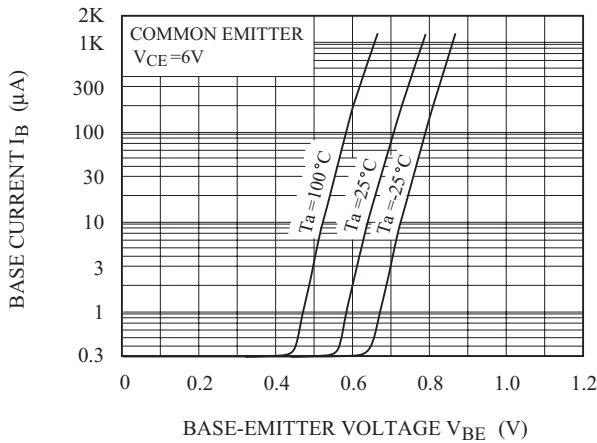

$P_c - T_a$

