

SM320A thru SM3100A

Schottky Barrier Rectifiers

Reverse Voltage 20 to 100V Forward Current 3.0A

FEATURES

- * Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- * Low power loss, high efficiency
- * For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- * Guardring for over voltage protection
- * High temperature soldering guaranteed: 260°C/10 seconds at terminals

Mechanical Data

Case: JEDEC DO-214AC,
molded plastic over glass body
Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026
Polarity: Color band denotes cathode end
Mounting Position: Any
Weight: 0.0023 oz., 0.065 g
Handling precaution: None



We declare that the material of product compliance with ROHS requirements

1. Electrical Characteristic

Maximum & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

Parameter Symbol	symbol	SM320A	SM330A	SM340A	SM350A	SM360A	SM380A	SM3100A	Unit
device marking code		S32	S33	S34	S35	S36	S38	S310	
Maximum repetitive peak reverse voltage	V_{RRM}	20	30	40	50	60	80	100	V
Maximum RMS voltage	V_{RMS}	14	21	28	35	42	56	70	V
Maximum DC blocking voltage	V_{DC}	20	30	40	50	60	80	100	V
Maximum average forward rectified current at TC = 75°C	$I_{F(AV)}$	3.0							A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	100							A
Typical thermal resistance (Note 1)	$R_{\theta JA}$	160							°C/W
Operating junction and storage temperature range	T_J, T_{STG}	-40 to +150							°C

Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

Parameter Symbol	symbol	SM320A	SM330A	SM340A	SM350A	SM360A	SM380A	SM3100A	Unit	
Maximum instantaneous forward voltage at 3.0A	V_F	0.55			0.70		0.85		V	
Maximum DC reverse current TA = 25°C at rated DC blocking voltage TJ = 100°C	I_R	0.2				30				mA
Typical junction capacitance at 4.0V, 1MHz	C_J	160								PF

NOTES:

1. 8.0mm² (.013mm thick) land areas

SM320A thru SM3100A

2. Ratings and Characteristic Curves (TA = 25°C unless otherwise noted)

Fig. 1 - Forward Current Derating Curve

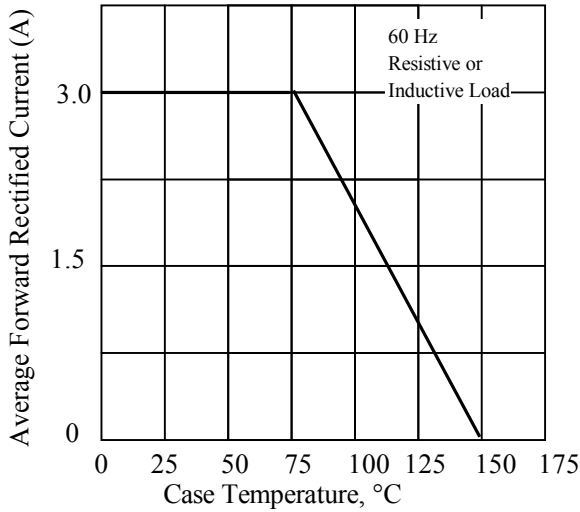


Fig. 2 - Maximum Non-repetitive Peak Forward Surge Current

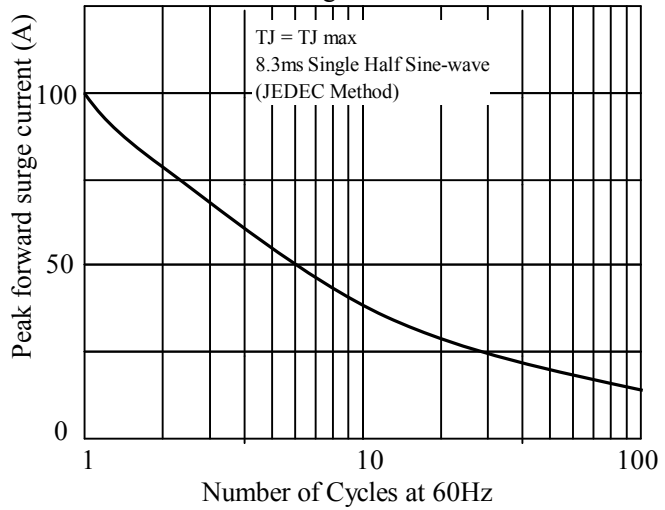


Fig. 3 - Typical Instantaneous Forward Characteristics

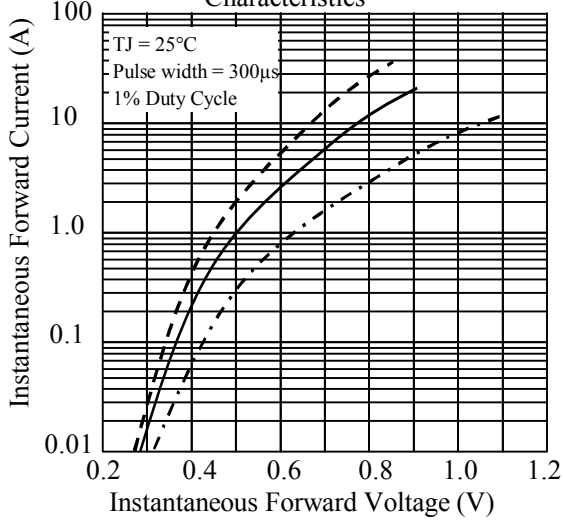


Fig. 4 - Typical Reverse Characteristics

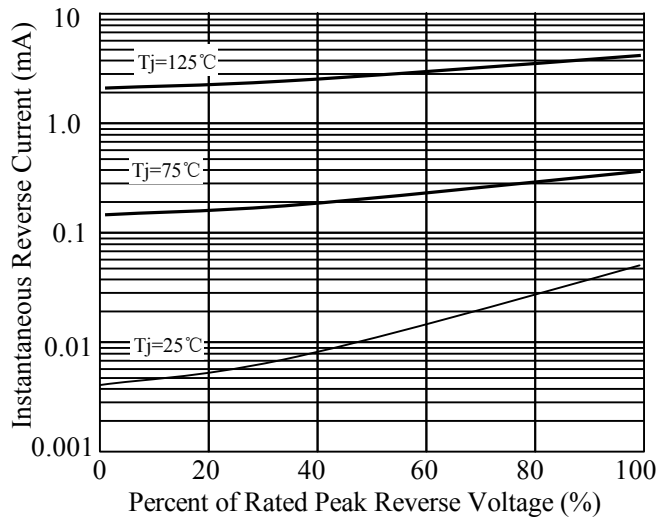


Fig. 5 - typical transient thermal impedance



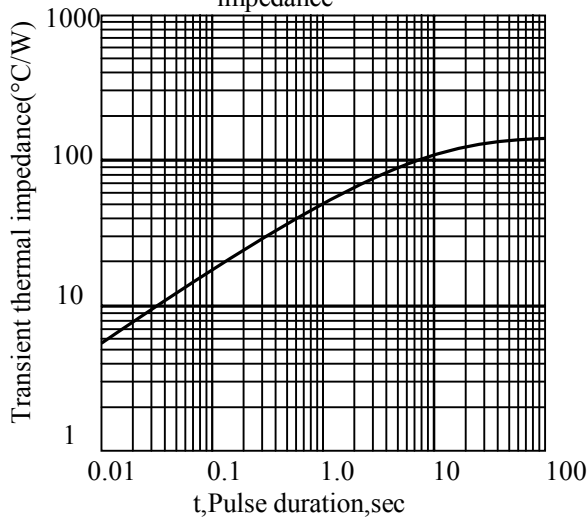


Fig. 6 - Typical Junction Capacitance

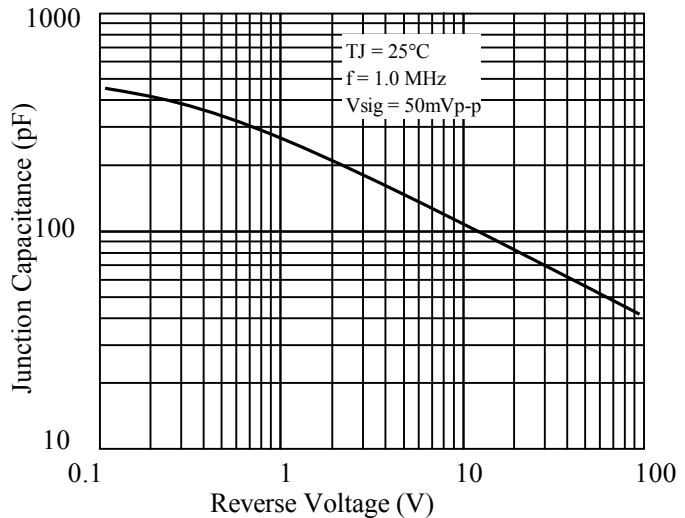


SM320A thru SM3100A

3. dimension:

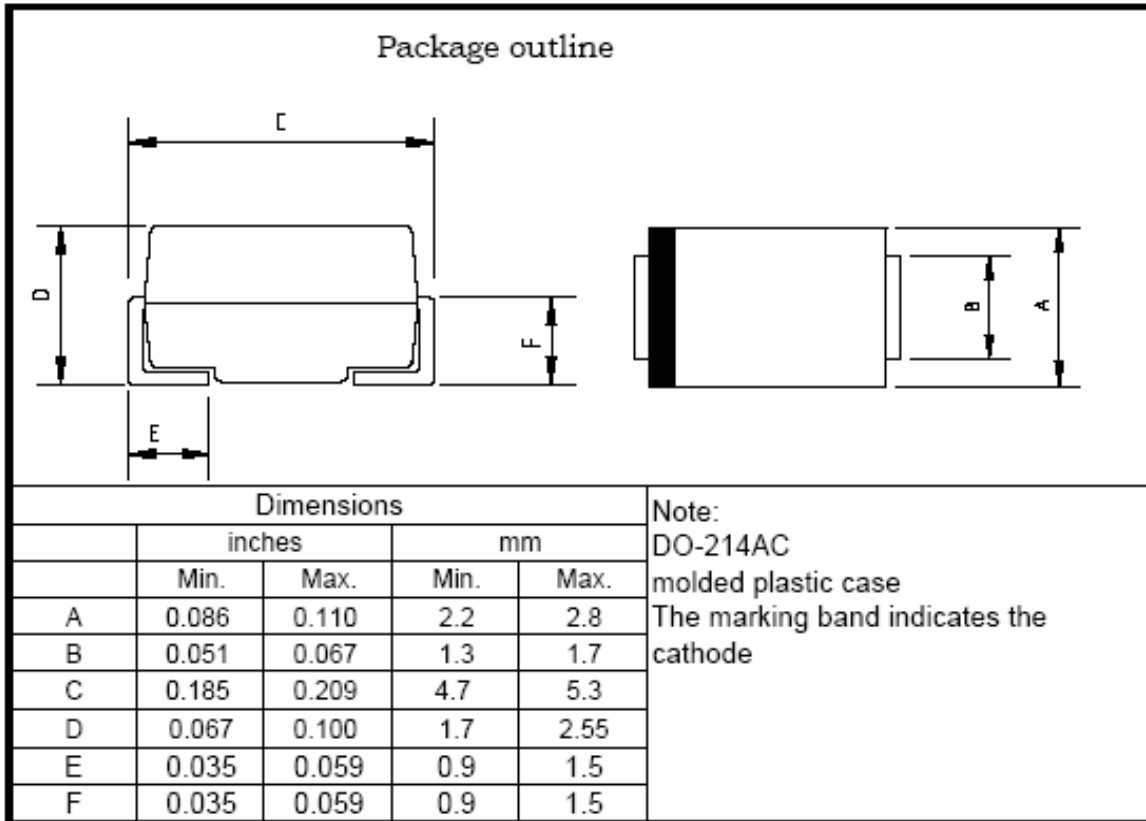

Mounting Pad Layout

---SMA

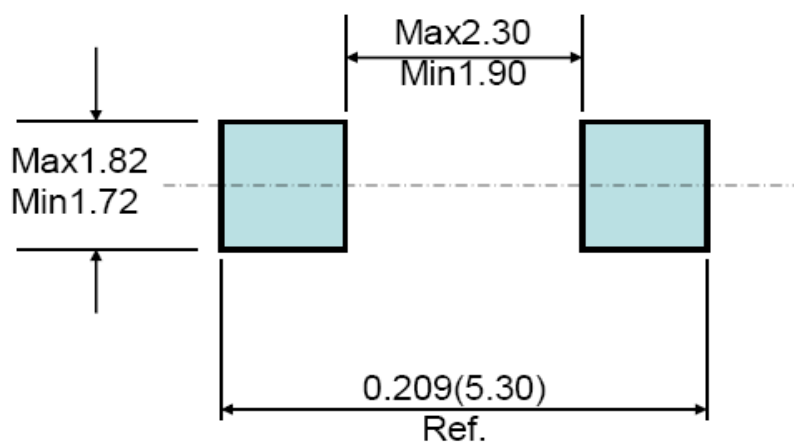

**LRC**乐山无线电股份有限公司
Leshan Radio Company, Ltd

SM320A thru SM3100A

4. Update Record

版次	更新记录	更新作者	更新日期
1	第一版	周杰	2010-4-28
2	1. 修正VF测试条件 2. 修改结温为150度。	周杰	2010-6-8
3	更新IR规格参数	谭志伟	2018-12-25
C	VF 0.5V变更到0.55V	谭志伟	2021-10-09