

RS201 THRU RS207

Glass Passivated Bridge Rectifiers

Reverse Voltage - 50 to 1000 Volts Forward Current - Amperes

Features


- Glass passivated chip
- Low forward voltage drop
- Ideal for printed circuit board
- •Meet UL flammability classification 94V-0

Mechanical Data

- Polarity: Symbol marked on body
- Mounting position: Any

Applications

 General purpose use in AC/DC bridge full wave rectification, for home appliances, office equipment, etc.

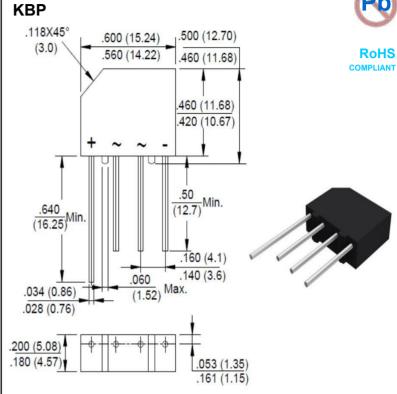

Package Outline Dimensions in Inches (Millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

| Characteristics | Symbol | RS201 | RS202 | RS203 | RS204 | RS205 | RS206 | RS207 | Unit |
|--|------------------|-------------|-------|-------|-------|-------|-------|-------|------------------|
| Maximum Repetitive Peak Reverse Voltage | VRRM | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| Maximum RMS Voltage | VRMS | 35 | 70 | 140 | 280 | 420 | 560 | 700 | V |
| Maximum DC Blocking Voltage | VDC | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| Maximum Average Forward Rectified Current @Ta=50 ℃ | I(AV) | 2 | | | | | | | Α |
| Peak Forward Surge Current, 8.3mS Single Half Sine-Wave, | IFSM 50 | | | | | | | | А |
| Superimposed on Rated Load (JEDEC Method) | IFSIVI | 30 | | | | | | | |
| I ² t Rating for Fusing (t<8.3mS) | l ² t | 10.4 | | | | | | | A ² s |
| Peak Forward Voltage per Diode at 2A DC | VF | 1.1 | | | | | | | V |
| Maximum DC Reverse Current at Rated @TJ=25℃ | IR | 10 | | | | | | | μΑ |
| DC Blocking Voltage per Diode @TJ=100℃ | I IR | 1.0 | | | | | | | mA |
| Operating Junction Temperature Range | TJ | -55 to +150 | | | | | | | $^{\circ}$ |
| Storage Temperature Range | Tstg | -55 to +150 | | | | | | | $^{\circ}$ |

www.ndone.cn

www.comonsemi.com

Rating and Characteristic Curves RS201 THRU RS207





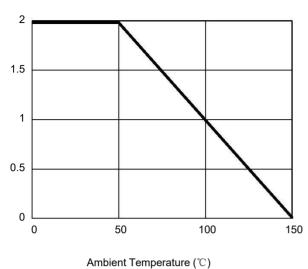


Fig. 2 - Maximum Non-Repetitive Surge Current

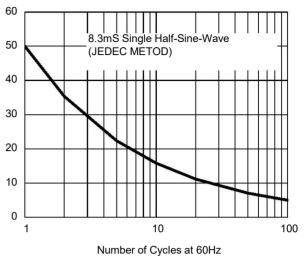


Fig. 3 - Typical Reverse Characteristics


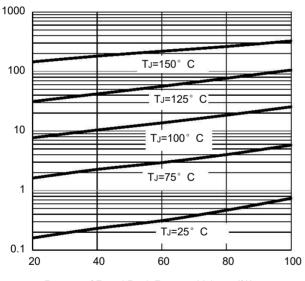


Fig. 4 - Typical Forward Characteristics

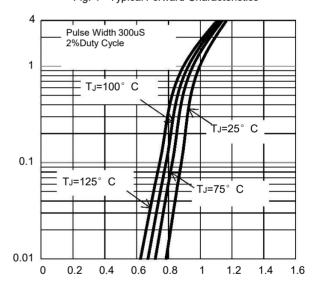

Percent of Rated Peak Reverse Voltage (%)

Instantaneous Forward Voltage (V)

www.ndone.cn

www.comonsemi.com